


F6R"扑天雕"远射充电手电筒

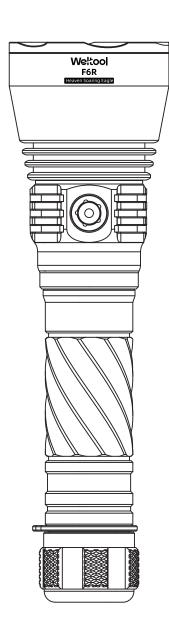

产品描述: 产品特点: 产品特点:

这个F6R是一个高亮远射型充电手电筒,全功率输出可达5,200流明,照射距离1,202 米。标配一节3.6V 低内阻的15,000mAh磷酸锰铁锂离子电池,循环充放寿命是常规 三元锂离子电池两倍。F6R灯头有卫途专利充电结构(ZL 2019 2 0893123.0),防 水防尘; USB-C充电接口处带有充电指示灯,充电状态一目了然; 灯头上还设置了一 个不锈钢UNC 1/4"螺纹孔,可将手电筒安装在三脚架上; 手电尾端标配一个不锈钢伞 绳环,可加装背带方便携带。

F6R充电功率可达18W, USB-C双向输出/输入,集成 QC2.0 / QC3.0/SCP 输出快充协议、FCP/AFC 输入输出快充协议、TYPE-C/PD2.0/PD3.0 输入输出协议、PPS 输出协议、BC1.2/Apple/三星的 DCP 协议,可作为移动电源为手机等数码产品充电。
F6R有5个档位可选,并且带有爆闪功能;侧按电子开关带有电量指示灯,关机状态还可以锁定开关防止误触;F6R光强可达361,500坎德拉,特别适合搜索,救援以及户外探险、野外作业等用途。

• 手电筒具有电池过放电保护,电池反接保护,低电压提醒功能,低电压截止保护功能

- 全功率模式带有过热保护功能; 手电无频闪、无噪音, 低待机电流
- 18W快充,双向输出输入,支持高压 SCP、双向PD3.0等全部快充协议
- 专利USB充电结构,防水防尘;USB口防水盖带磁铁,充电时可将防水盖吸附在筒身上
- 使用1节IXR33-150 (33140) 锂离子电池
- IP67防护等级,可以在暴雨中使用
- 此手电通过1米高度耐摔测试
- 每只手电都有独立序列号
- 重量: 960±1克(含电池)
- •尺寸(±0.5mm): (头部直径) 73mm, (筒身直径) 39mm, (长度) 259.5mm
- 包括: 1节IXR33-150 (33140) 锂离子电池, Type-C充电线, O圈

# 相关认证:

- •铝合金CNC加工,表面硬质阳极氧化处理
- 铝合金反光杯, 镀膜钢化玻璃镜片, 不锈钢镜片压圈
- 单颗大功率白光X-LED光源
- 输出参数:

产品特点:









- 全功率 高亮 中亮 低亮 节能 爆闪 光通量 5,200-1,900 流明 3,400-2,160 流明 1,900流明 580流明 150流明 N/A 光强度 361,500坎德拉 222,000坎德拉 124,200坎德拉 36,000坎德拉 10,640坎德拉 N/A 照射距离 1.202米 942米 704米 379米 206米 N/A 续航时间 4分钟+2小时29分钟 8分钟+2小时13分钟 3小时19分钟 11小时50分钟 47小时30分钟 N/A
- 以上数据使用Weltool IXR33-150电池在常温环境测试所得,不同测试环境及条件会对测试数据有影响,仅做参考。

- 首先正确安装电池,本产品只能使用1节3.6V 33140锂离子电池。
- 手电筒具有极性保护功能,如无法点亮,请及时检查电池是否反接。
- 单按开关可开启或者关闭手电, 开关按键上带有电量指示灯。
- 开启手电后,长按开关不松手,手电会自动切换不同的亮度,松开开关即可选定当前亮度并常亮;在关机或者任意亮度档快速双击可进入全功率档,快速三击可开启爆闪。手电关闭后会记忆关闭前的模式(但不记忆全功率和爆闪)。
- 开机瞬间或者使用过程中,电量指示灯会开启(电量充足时绿灯,低电量时红灯, 5秒后指示灯自动关闭);超低电量时红灯会一直闪烁,手电筒主灯也会闪烁,随 后手电随时会关机。
- 在手电锁定状态时也可检测电量:按开关一次,电量指示灯会开启。
- 充电口有4个充电状态指示灯,充电时4灯的显示方式:

电量C (%)	电量C (%) 灯1		灯3	灯4	
充满 亮		亮	亮	亮	
75%≤C	5%≤C 亮		亮	0.5Hz 闪烁	
50%≤C<75%	亮	亮	0.5Hz 闪烁	灭	
25%≤C<50%	亮	0.5Hz 闪烁	灭	灭	
C<25%	0.5Hz 闪烁	灭	灭	灭	

#### • 请勿自行拆卸部件,否则将会导致保修失效并可能损坏手电。

- 手电点亮时热量会及时导出,因此使用中发热是正常现象;但不建议长时间连续点亮全功率档,当手感发热比较大时请及时转换更低的亮度档以确保不会烫伤。
- 手电高亮时请远离易燃物,不要照射眼睛和皮肤,远离儿童存放。
- 手电筒身末端及防水盖密封O圈随使用频率和时间可能会老化,请及时更换以维持防水性能。
- 当手电出现异常的闪烁或者无法点亮的时候,尝试用酒精棉签清洁导电接触面。
- 本手电防水性能优良,但不可作为潜水使用。

使用提示:

### 开关锁定和解锁功能:

- 关机状态长按开关超过2秒即可锁定,开关按键上指示灯及主灯同时闪烁3次提示已 经锁定;锁定后,手电筒会记忆锁定状态及档位,此时更换电池再次使用时需要解 锁。
- 锁定后,长按开关超过2秒即可解锁,解锁后主灯会以记忆档位开启。

大连光明和电贸易有限公司

邮编: 116091


电话: +86 0411-84618462 网址: www.weltool.com

地址:中国辽宁省大连市甘井子区汇利街69号24层3、4号





F6R "Heaven Soaring Eagle" Rechargeable flashlight



# Product Introduction: Features:

This F6R is a high-lumen and long-range rechargeable flashlight with a turbo output of 5,200 lumens and a throwing distance of 1,202 meters. It comes with a 3.6V 15,000mAh LMFP battery, and its cycle life is twice that of ordinary lithium-ion batteries. The F6R head has a Chinese patented charging structure, which is waterproof and dustproof; the USB-C charging port has a charging indicator light; there is also a stainless steel UNC 1/4" threaded hole on the light head, which can be installed on a tripod; there is a stainless steel parachute ring at the end of the flashlight body, which can be equipped with a shoulder strap for easy carrying.

The charging power of F6R can reach 18W, and the USB-C port can output/input. It integrates QC2.0/QC3.0/SCP output protocol, FCP/AFC input and output protocol, TYPE-C/PD2.0/PD3.0 input and output protocol, PPS output protocol, BC1.2/Apple/Samsung's DCP protocol, and can be used as a power bank to charge mobile phones and other digital products. F6R has 5 modes and strobe; the side-pressed electronic switch has a power indicator light, and the switch can be locked in the off state to prevent accidental touch; F6R has 361,500 candela, which is particularly suitable for search, rescue, outdoor adventure, field operations and other purposes.

#### Features:

- Aluminum alloy CNC machined, hard anodized surface
- Aluminum alloy reflector, coated tempered glass lens, stainless steel bezel
- Single high-power white light X-LED light source
- Output:

	Turbo	High	Med	Low	Eco	Strobe
Output	5,200-1,900 lumens	3,400-2,160 lumens	1,900 lumens	580 lumens	nens 150 lumens	
Intensity	361,500cd	222,000cd	124,200cd	36,000cd	10,640cd	N/A
Distance	nce 1,202m	942m	704m	379m	206m	N/A
Runtime	4min+2h29min	8min+2h13min	3h19min	11h50min	47h30min	N/A

These data are obtained by testing the Weltool IXR33-150 battery at room temperature. Different test environments and conditions will affect the test data and are for reference only.

# Operating Instructions:

• The flashlight has battery over-discharge protection, battery polarity

• High power mode with temperature protection function; no flicker, no noise,

USB-C output/input, supports all quick charge protocols such as high-voltage

• waterproof cover with magnet, it can be attached to the flashlight body when

• Use 1 IXR33-150 (33140) LMFP battery, 1,500 charge and discharge cycles

• Dimensions (±0.5mm): (head diameter) 73mm, (body diameter) 39mm,

• Includes: 1 IXR33-150 (33140) battery, 1 USB-C to USB-C charging cable, O-ring

• Patented USB charging structure, waterproof and dustproof; USB port

protection, and low voltage reminder functions

low standby current

charging

SCP, bidirectional PD3.0, etc.

• IP67, can be used in heavy rain

Weight: 960±1g (including battery)

(length) 259.5mm

• This flashlight has passed the 1-meter drop test

• Each flashlight has an independent serial number

- First, install the battery correctly. This product can only use 1 3.6V 33140 lithium-ion battery.
- The flashlight has a polarity protection function. If it does not work, please check the battery.
- Press the switch to turn on or off the flashlight. There is a power indicator on the switch button.
- After turning on the flashlight, press and hold the switch, the flashlight will
  automatically switch to different modes. Release the switch to select the current
  mode and keep it on; when it is turned off or in any mode, double-click quickly
  to enter Turbo, and triple-click quickly to turn on Strobe. After the flashlight is
  turned off, the mode before turning it off will be remembered (but Turbo and
  Strobe are not remembered).
- At the moment of turning on or when the flashlight is working, the power
  indicator will turn on (green light when the power is sufficient, red light when
  the power is low, and the indicator will automatically turn off after 5 seconds);
  when the power is very low, the red light will keep flashing, the main light of the
  flashlight will also flash, and then the flashlight will turn off at any time.
- The power can also be detected when the flashlight is locked: press the switch once, and the power indicator will turn on.
- The charging port has 4 blue charging status indicators. The display mode of the 4 lights during charging is:

Battery status C (%)	Light 1	Light 2	Light 3	Light 4
Fully charged	ON	ON	ON	ON
75%≤C	ON	ON	ON	0.5Hz Flash
50%≤C<75%	ON	ON	0.5Hz Flash	OFF
25%≤C<50%	ON	0.5Hz Flash	OFF	OFF
C<25%	0.5Hz Flash	OFF	OFF	OFF

# Product Ratings:







- Press the switch for more than 2 seconds in the off state to lock. The indicator
  light on the switch button and the main light of the flashlight will flash 3 times
  at the same time to indicate that it has been locked; after locking, the flashlight
  will remember the locked state and the mode before locking. At this time, you
  need to unlock it when replacing the battery and using it again.
- After locking, press the switch for more than 2 seconds to unlock. After unlocking, the main light will turn on in memory mode.

# Using Tips:

Switch lock and unlock function:

- Do not disassemble the parts by yourself, otherwise it will cause the warranty to be invalid and may damage the flashlight.
- It is normal for the flashlight to heat up when working; but it is not
  recommended to use the Turbo mode continuously and for a long time. When
  the hand feels hot, please switch to a lower mode in time to ensure that you will
  not get burned.
- When the flashlight is working at high power, please keep away from flammable materials, do not irradiate the eyes and skin, and store away from children.
- The O-rings at the end of the flashlight body and the waterproof cover may age
  with the frequency and time of use. Please replace them in time to maintain the
  waterproof performance.
- When the flashlight flashes abnormally or does not work, try to clean the conductive contact surface with an alcohol cotton swab.
- This flashlight has excellent waterproof performance, but it cannot be used for diving.

# Dalian Gentlite Trade Co.,Ltd.

Zip Code:116091 Tel: +86 0411-84618462 Website:www.weltool.co Address:Room 3&4, 24th





正反面,折叠2次, 高200, 宽500, 105g铜版纸印刷