

产品描述:

W7是一个革命性的，带有泛光的远射型LEP战术手电筒，700流明，80万坎德拉，照射距离1,788米。采用卫途创新设计的反光杯光学结构，其光束不但具有LEP光源高照度的特性，同时还有跟LED手电筒一样的大面积泛光效果。W7的LEP光源符合光生物安全IEC 62471 Exempt及激光蓝光伤害安全IEC 60825 Class 1，出光为荧光光束，更安全。使用一节21700锂离子电池，默认开机即高亮，隐藏爆闪和低亮档；关机状态时只需轻按开关即可瞬间开启高亮，也可以快速连续半按开关四次开启爆闪。W7低照度泛光可以让用户有效保持暗适应，有更好的态势感知；而中心聚光光束可照射更远距离，尤其适合救援，战术，搜索等用途。

产品特点:

- 铝合金CNC加工，表面硬质阳极氧化处理
- 铝合金反光杯及镀膜钢化玻璃镜片
- 特制LEP模组,5700-6700K色温，寿命约10,000小时
- 输出参数:

	高亮	爆闪	低亮
光通量	700流明	N/A	195流明
光强度	800,000坎德拉	N/A	246,200坎德拉
照射距离	1,788米	N/A	992米
续航时间	2小时40分钟	N/A	3小时54分钟

(使用Weltool UB21-50 5000mAh 21700充电电池在微风、25摄氏度以下环境测试所得，不同测试环境及标准会有差异，仅供参考。)

产品特点:

- 光源符合IEC 60825 Class 1及IEC 62471 Exempt
- 使用1节21700锂离子电池
- 尾部按钮正向开关，50,000次按压寿命
- 高效率驱动电路，无噪音无频闪
- 带有过热保护，手电筒过热时会自动降低亮度以防止过热
- 带有反接保护、低电压提示，电池过放保护功能
- 通过1米耐摔测试
- 防护等级可达IP67
- 每只手电都有独有的序列号
- 尺寸(±0.5mm): (头部直径) 41.5mm, (尾盖直径) 32.8mm, (长度) 174.5mm
- 重量:199.5±0.5克 (不含电池)
- 附送:UB21-50锂离子电池, Type-C充电线, 防水圈、不锈钢口袋夹

操作说明:

- 首先正确安装并使用电量充足的优质21700锂离子电池，如无法点亮，请检查电池是否反接。
- 安装电池后，半按一次尾部开关按钮不松手，即可瞬间开启高亮，松手即关闭；此时用力按下开关“咔哒”声响后即可保持常亮，再次“咔哒”按下后关闭手电筒。
- 关机状态下快速连续半按尾按4次不松手即可进入隐藏模式，默认开启即为爆闪，此时松开开关马上再半按一次不松手可切换到低亮，低亮和爆闪可以按此方式循环切换；半按切换后用力按下开关锁定爆闪或者低亮常亮，在隐藏模式关机超过1.5秒后自动退出隐藏模式，恢复到高亮模式。
- 当电池电量过低，手电筒灯光有闪烁提示，请及时更换电池。
- 当电池电量耗尽，手电会自动停止工作。

使用提示:

- 请勿自行拆卸部件，否则将会导致保修失效并可能损坏手电。
- 手电工作时热量会及时导出，因此发热是正常现象。建议在户外通风（风速超过5m/s）、气温在25摄氏度以下环境下使用。手感发热比较大时请及时关闭手电，待到冷却后可再开启使用。
- 长期使用后，手电的防水圈可能会老化，请及时更换防水圈以维持手电的防水性能。
- 在手电尾部螺纹涂抹过多的润滑脂可能会造成导电异常。
- 当手电出现异常的闪烁或者无法点亮的时候，有可能是接触面有污渍导致，尝试用酒精棉签清洁导电接触面。
- 由于锂离子电池会自放电，建议在长期不使用手电时，将电池取出，并至少每2-3个月为电池充电一次。
- 此手电防水效果优良，但不可作为专业潜水手电使用。尤其在手电发热时不能将其放入冷水中，以免因温度差形成气压差造成渗水。
- 严禁在手电点亮时直接或者间接照射眼睛及皮肤，以免造成视力损伤或皮肤灼伤，并远离儿童。





大连光明和电贸易有限公司

邮编: 116091
电话: +86 0411-84618462
网址: www.weltool.com
地址: 中国辽宁省大连市甘井子区汇利街69号24层3、4号



W7 "The Prodigal " LEP tactical flashlight

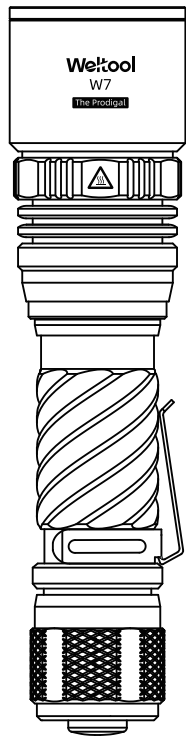

Product Introduction:

W7 is a long-range LEP tactical flashlight with spill, 700 lumens, 800,000 candela, and a throw distance of 1,788 meters! W7's LEP light source complies with IEC 62471 Exempt and IEC 60825 Class 1. The innovatively designed reflector optical structure makes its beam not only have the high candela characteristics of the LEP light source, but also has a large area of spill. The default power-on mode is high mode, hiding the strobe and low. W7's spill allows users to effectively maintain dark adaptation and have better situational awareness, and the hot spot can be thrown farther, suitable for rescue, tactics, search and other purposes.

Features:

- Aluminum alloy CNC processed, surface hard anodized
- Aluminum alloy reflector and coated tempered glass lens
- Special LEP module, 5700-6700K color temperature, life of about 10,000 hours
- Output:

	High	Strobe	Low
Light out	700lm	N/A	195lm
Beam Intensity	800,000cd	N/A	246,200cd
Throwing distance	1,788m	N/A	992m
Runtime	2h40min	N/A	3h54min

(Tested with Weltool UB21-50 rechargeable lithium-ion battery, outdoor, constant on, below 25 degrees Celsius, Different test environments and standards may vary and are for reference only.)

Features:

- Uses 1 21700 lithium-ion rechargeable battery
- Tail button forward switch, 50,000 press lifespan
- High-efficiency drive circuit, no noise and no flicker
- With temperature control protection, with polarity protection
- With low voltage prompt and battery over-discharge protection function
- Passed 1-meter drop test
- IP67
- Each flashlight has a unique serial number
- Dimensions (±0.5mm): (head diameter) 41.5mm, (tail cover diameter) 32.8mm, (length) 174.5mm
- Weight: 199.5±0.5g (excluding battery)
- Included: UB21-50 lithium-ion battery, Type-C charging cable, O-ring, stainless steel pocket clip

Operating Instructions:

- First install the battery correctly
- Half-press the tail switch button once to turn on the high mode, release it to turn off, even if this operation is frequent, it will be high. At this time, press the switch hard to make a "click" sound to keep working continuously, and press the "click" again to turn off the flashlight.
- The hidden mode can be activated by half-pressing more than 4 consecutive times in the off state. When the hidden mode is turned on, the strobe is first. At this time, release the switch and then half-press it to switch to low immediately. Low and strobe can be switched in a cycle. Press the switch firmly to lock the strobe or low continuous operation; in the hidden mode, it will

Operating Instructions:

- automatically exit the hidden mode and return to the high mode after shutting down for more than 1.5 seconds.
- When the battery power is low, the main light of the flashlight will flash to remind you, please charge the battery in time.
- When the battery power is exhausted, the flashlight will automatically stop working.

Using Tips:

- Do not disassemble the parts by yourself, this will void the warranty and may damage the flashlight.
- It is normal for the flashlight to heat up when it is working; however, it is only recommended to use it in an environment where the outdoor ventilation (wind speed exceeds 5m/s) and the temperature is below 25 degrees Celsius! Turn off the flashlight in time when the hand feels a lot of heat, turn it on again after the flashlight cools down.
- After long-term use, please replace the O-ring in time to maintain waterproof performance.
- Applying too much grease to the threads at the end of the flashlight body may cause electrical conduction problems.
- Please clean the conductive contact surface of the flashlight in time to ensure the normal operation of the flashlight.
- We recommend that you remove the batteries and recharge the batteries at least every 2-3 months when you will not use the flashlight for an extended period of time.

Using Tips:

- This flashlight has excellent waterproof effect, but it cannot be used as a professional diving flashlight.
- Do not aim the beam at the eyes and skin to avoid vision damage or skin burns, and keep away from children.



Dalian Gentlite Trade Co.,Ltd.

Zip Code:116091

Tel: +86 0411-84618462

Website:www.weltool.com

Address:Room 3&4, 24th Floor, No.69 Huili Street,Ganjingzi District,Dalian ,China

正反面，折叠四次，
高150，宽350，105g铜版纸印刷